


Clustering Methods

Exercises 3/7, 8.2.2022

Five tasks required. If done more, each earn one bonus point.

1. Implement random swap algorithm. Last week task #5 compared k-means and random swap theoretically. Perform similar comparison but now based on empirical tests. How many trial swaps can we perform using the same as k-means algorithms requires?
2. Assume our data has only similarity function but the algorithm needs a distance function. How would you solve this issue? Hint: convert the similarities to distances. How would it affect the clustering in practice (if at all)?
3. Consider a black-and-white image of size which is all-white, except a small 10×10 pixel rectangular in the middle which is black. Assume perfect segmentation with two segments: one consisting of the white pixels and one consisting of the black pixels. Calculate *Mumford-Shah cost function* for this segmentation. Is this segmentation optimal?
4. Calculate mean internal weight (MIW) for the following clustering. Can you improve it?

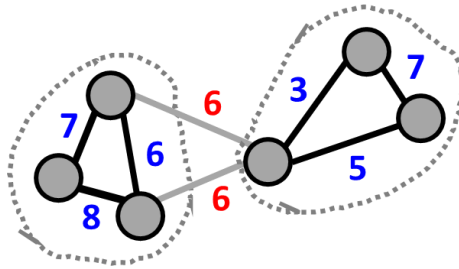

5. Can we use standard k-means for the above data example? If yes, how? If not, why not?

Bonus task:

6. Considering the random swap is quite ... random. Can you invent some better way to select *where* the new centroid should be added (instead of random point)? Test it and compare against the standard random swap algorithm.